

TS-SERIES

奥凯斯专业音响 WWW.AOKNICE.COM

Model: TS-450

内置无源分频器驱动的 **4** 单元/三音路全频音箱

Built-in Passive Crossover Drive Three Full-range Speaker Sound

适用范围 Application

剧场、礼堂、多功能厅、固定安装以及中小型流动演出等声音重放要求很高场所
High Standard Occasions Such As Mobile Performance, stadium, theater, lectur
Ehall And Multi Functional Meeting Rooms

低音频段补强 Reinforcing Bass Frequencies


若需要延展低音频段,增强音乐感,可适配 SB218 超低频音箱

If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music,
You Can Fit SB218 super Bass Speaker



音箱技术参数 Technique specific

Drivers	单元组成	LF 低频:2x15" /4"Voice-coil (Φ100mm 音圈) /Φ220mm 钹磁 MF 中频:1x12" /3"Voice-coil (Φ75mm 音圈) /Φ180mm 钹磁 HF 高频:1x1.5" /3"Voice-coil (Φ75mm 音圈) /3"复合钛膜/钹磁
Frequency response	频率响应	40-18K(±3dB)Hz 赫兹
Dispersion (HxV)	覆盖角度	60°x40° (-6dB),号角可 90°旋转 (Rotatable Horn)
Sensitivity	灵敏度	102 分贝/1 瓦.1 米
MaximumSPL	最大声压级	132dB/AES 连续 ; 138dB/Peak 峰值
Nominal Impedance	标称阻抗	4 欧姆 (OHMS)
Power handling	功率承受	1200W(AES 额定)/2400W(节目) /4800W (Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	1300W @8Ω
Finish	表面处理	黑色环保耐磨油漆涂装 Environmentally Friendly Water- Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂和 2 轮 Built-in Multi-point Screws Bearing Hanging
Dimensions(HXWXD)	外形尺寸	1222mmx(F535,R235)mmx560mm
Net /Gross Weight	净重/毛重	70kg/75Kg

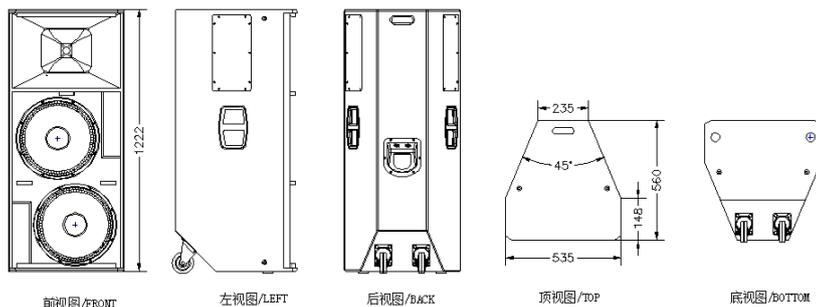

矩阵音箱系统 TS-SERIES; TS 系列音箱配置高质量的驱动器,科学的声学箱体设计,高效率、大功率、大动态;该系列低频深沉饱满,中频通透,高频细腻,音域宽阔等特点,特别适用于对声音有更高要求的扩音场所。