

## TS-150N

内置无源分频器驱动的 2 单元/两音路全频音箱

Built-in Passive Crossover Drive Two Full-range Speaker Sound

### 适用范围 Application

剧场、礼堂、多功能厅、音乐酒吧等声音重放要求很高的场所

High Standard Occasions Such As Mobile Performance, stadium ,theater,lectur

Ehall And Multi Functional Meeting Rooms

### 低音频段补强 Reinforcing Bass Frequencies

若需要延展低音频段,增强音乐感,可适配 SB-118 或 SB-218 超低频音箱


If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music,

You Can Fit SB-118 or SB-218 super bass speaker



### 音箱技术参数 Technique specification

	单元组成	LF 低频:1x15" /3"Voice-coil ( 75mm 音圈 ) 钕磁 HF 高频:1x15" /3"Voice-coil ( 75mm 音圈 ) /3"复合钛膜/钕磁
Frequency response	频率响应(-3dB)	45-19K Hz 赫兹
Dispersion ( HxV)	覆盖角度 ( -6dB)	80°x50°号角可 90°旋转 ( Rotatable Horn)
Sensitivity	灵敏度	100 分贝/1 瓦.1 米
MaximumSPL	最大声压级	127dB/AES 连续 ; 133dB/Peak 峰值
Nominal Impedance	标称阻抗	8 欧姆 ( OHMS)
Power handling	功率承受	500W(AES 额定)/1000W ( 节目 ) 2000W ( Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	1000W - 1300W @8Ω
Finish	表面处理	黑色环保耐磨油漆涂装 Environmentally Friendly Water- Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂和 1xΦ35mm 支撑座 Built-in Multi-point Screws Bearing Hang ing And 1xΦ35mm Support Base
Dimensions(HXWXD)	外形尺寸	690mmx450mmx460mm
Net Weight	净重	28kg

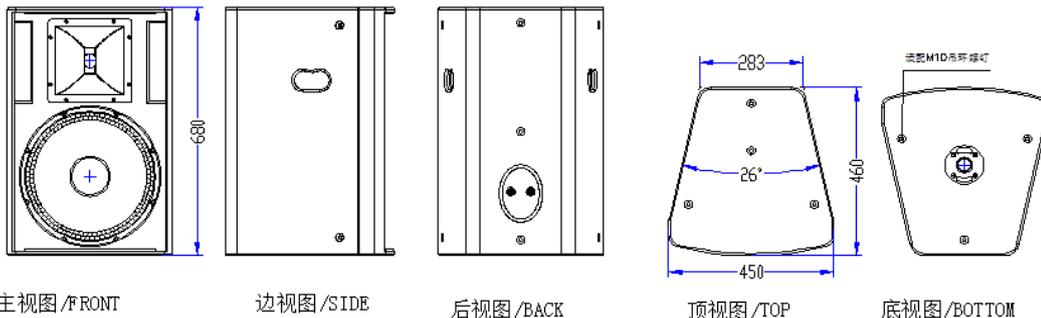

**矩阵音箱系统 TS-SERIES:** TS 系列音箱配置高质量的驱动器,科学的声学箱体设计,高效率、大功率。大动态;该系列低频深沉饱满,中频通透,高频细腻,音域宽阔等特点,特别适用于对声音有更高要求的扩音场所。